


CAT 6A Shielded S/FTP 26 AWG Data Slim Patch Cord, LSZH - FCP6ASLS**



DESCRIPTION

FABNET Category 6A Shielded S/FTP Patch Cord Series are 4-pair, 26 AWG (stranded) and flexible cable structures terminated with shielded RJ45 connectors at both ends along with strain relief boot. CAT6A patch cables are used for Gigabit Ethernet 10GBASE-T speed and 500 MHz frequency requirements. These high-performance patch cords are available in various colors and lengths. All patch cords shall be compatible with both T568A and T568B wiring schemes

APPLICATIONS

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet), 10GBASE-T (10Gigabit Ethernet over limited distances as specified in the industry. 10GBASE-T standards)
- Digital video and broadband/baseband analog video
- Connection between wall outlets or equipment

SPECIFICATIONS & FEATURES

- Compliant with YD/T 926、ANSI/TIA-568.2-D、ISO/IEC 11801、IEC 60603-7
- Outer Jacket: LSZH
- PASS ISO11801 Channel Class EA & TIA Cat6A Channel TEST
- Meets individual length and color-coding requirements
- PoE compliance: Rated for 1000 cycles with IEEE 802.3af / 802.3at POE ++
- RoHS、REACH


PHYSICAL PROPERTIES

Basic Conductor	Stranded bare copper 26 AWG	Category	CAT 6A S/FTP
Insulation	HDPE	OD	1.00±0.05mm
Connector	Shielded RJ45	Color Code of Pairs	1 white-blue/blue, 2 white-orange/orange, 3 white-green/green, 4 white-brown/brown
Jacket	LSZH,IEC 60332-1	Connector	8P8C RJ45, 50μ inch gold plating
Outer Diameter	6.1±0.30mm	Cable lay-up	4 pairs with different pitches
Connector Housing:	Shielded RJ45 crystal	Contacts:	Brass,3Prongs
Clad Layer:	Gold Plating 50u"	Storage Temperature:	-20°C~+70°C
Inner screen	AL/Mylar,coverage≥120%	Outer screen	Tinned copper,≥40%

ELECTRICAL & MECHANICAL PROPERTIES

Contact Resistance:	<20mΩ
Insulation Resistance:	500MΩ
Voltage Proof:	1000V AC/1 minute no breakdown
Durability:	750 cycles Min
Temperature operating range	-20°C to 60°C
Characteristic Impedance:	100 ohm
Conductor DC resistance:	<14.8 ohm/100m (@20°C)
Before Aging: Tensile Strength:	≥10.0Mpa
After Aging: Tensile Strength:	≥8Mpa

TECHNICAL DRAWING

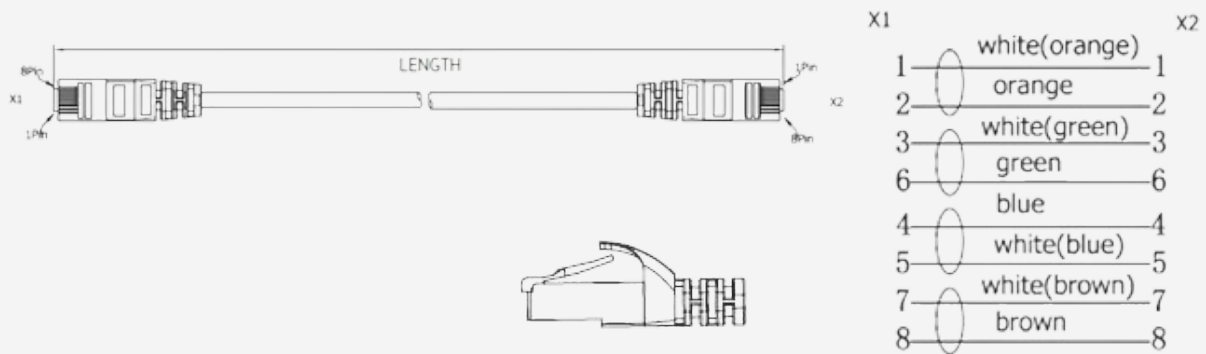

ORDERING INFORMATION

FCP6ASLSM**

CAT 6A S/FTP 26 AWG Data Slim Patch Cord, LSZH

*-Length Variants (0.5,01,02,03,05,10,15,20, Customized)

*-Colour Variants (Blue, Gray, Red, White, Green, Yellow, Black, Customized)